

Accident statistics displays UNF-IN-28D

Easy handling, Rugged and reliable



General

The accident statistics display „UNF-IN-28D“ serve the clear and current visualization of the number of accident-free days.

They are conceived for use in the Indoor and Semi-Outdoor range*.

The display „UNF-IN-28D“ is executed double-spaced with 1x four numbers and 1 x eight numbers. The characters have a character height of 100mm (Reading distance up to 30m). At this it can be elected between the character colours „Red, yellow, green, white and blue“.

Pluggable LED modules guarantee an extremely favourable spare part obtaining.

The brightness is separated adjustably for every LED number. Brightness differences which can give up because of the physical conditions after longer operating time are therefore compensable.

For the optional fixed text (here e.g.: This facility) is a placeholder above and below as well as next to the numeric display scheduled. Additional a free space exists for optional lettering (Logo ...).

The accident statistics displays „UNF-IN-28D“ is deliverable in execution case or execution front mounting.

Operating possibilities of the accident statistics displays „UNF-IN-28D“

- Autarkic drive:

The display works autarkic at this drive. Daily at 24.00/0.00 hour the value of the display is incremented +1. At a possible work accident the display value can be setted manually on „Null“ by a reset button or by a serial interface of the display. With the reset of the display value is taken over the date of the last accident into line 2 automatically.

By a further button the display value can be setted manually. Optionally the Reset button and the manually value setting can be carried out by a radio remote control. Additional exists the possibility to force the current time as well as the display value by a PC-Menue (WINDOWS). For this the accident statistics display gets connected to the integrated RS 232 interface with the Windows-PC.

The display data get remained at a failure of the power supply.

- Serial per RS 232, RS 485, RS 422, USB 2.0, Ethernet TCP/IP 10/100, Serial with licence free radiotransmission


Technical data

Application area:	Indoor and Semi-outdoor*
Display technology:	7-Segment-LED modules
Character height:	100mm, reading distance up to 30m
Character colours:	Red or yellow or green or white or blue
Number of the display lines:	2
Number of characters per line:	Line 1: Four; Line 2: eight
LED-Module steckbar:	Ja
Helligkeit der Ziffern einstellbar:	Ja, getrennt für jede Ziffer, für jede Zeile oder für alle Zeilen
Spannungsversorgung:	110-240VAC, oder 24VDC
Gehäusefarbe:	RAL 7035 (Lichtgrau) pulverbeschichtet, feinstrukturiert
Gehäusebefestigung:	Vier Bohrungen 8,5mm auf Gehäuserückseite
Abmessungen (BxHxT in mm):	Gehäuse: 800x550x120 Fronteinbau: 790x545x100
Befestigung bei Fronteinbau:	Rechteckausschnitt in Tafel und Befestigungs-Gewindebolzen M5 auf Frontplattenrückseite
Gehäuse-Betauungsschutz:	Optional

*Semi-outdoor: At protection of the display in front of direct incidence of light, rain, water or snow

Ordernumber key

I P - U N F - I N - 2 8 D - X X X - X X X

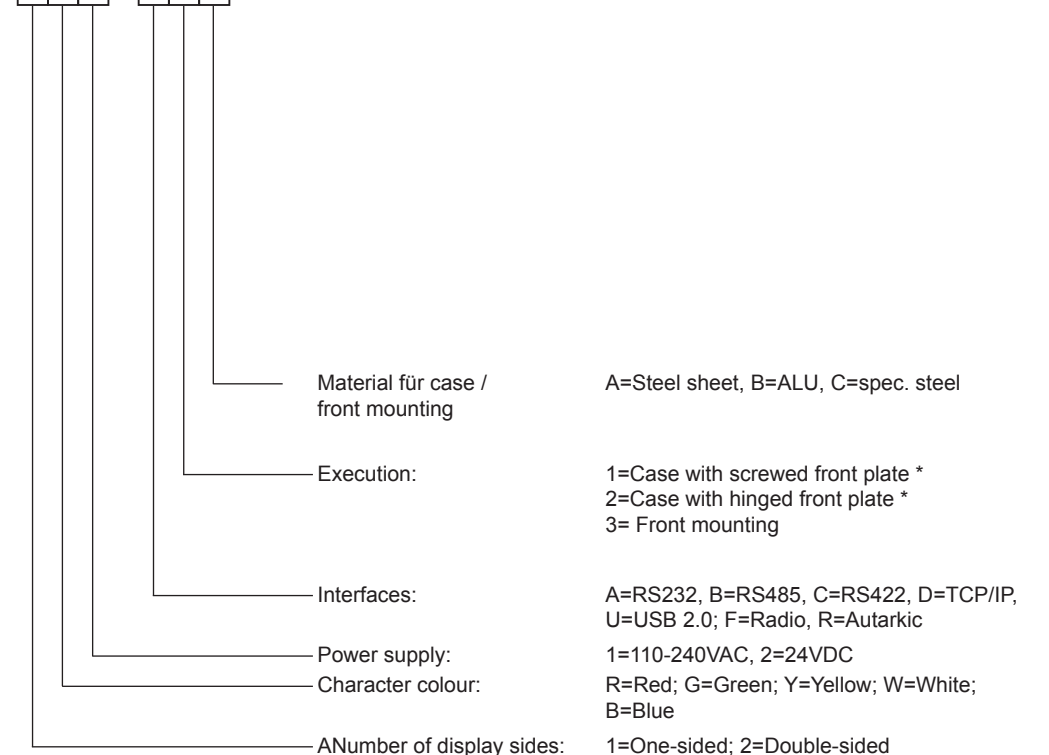

Determination help: If not applicable = X ; Not known at present = Z; * Optional: Case with 10° View inclination of the front side